

BatLEDs Series I 30/I 42



Features:


- BatLEDs due to its appearance like Bats hanging from the ceilings.
- There are 4 models available and they are certified for CE, IP65 and Full RoHS compliance.
- Easy mounting Installation
- Use of cree Higt power LEDs

Application


Airports, Railway Stations, Warehouse, Supermarkets, Tunnels, Indoor Sport Arenas and Building exterior lightning Indoor pools

Technical Specifications

■ Outline Drawing

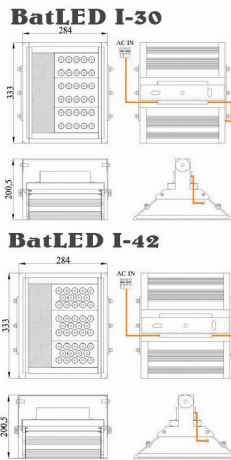

■ Polar Candela Distribution

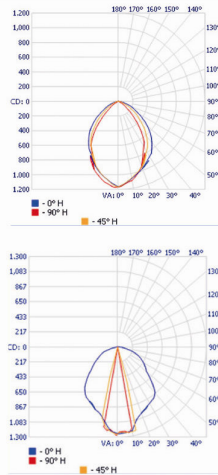

■ Illuminance

	Illuminance at a Distance	
	Center Beam LUX	Beam Width
1.7m	810.64 LUX	3.5m 2.4m
3.3m	202.66 LUX	6.9m 4.8m
5.0m	90.07 LUX	10.4m 7.2m
6.7m	50.67 LUX	13.8m 9.5m
8.3m	32.43 LUX	17.3m 11.9m
10.0m	22.52 LUX	20.7m 14.3m

■ Vert. Spread: 92.0° ■ Horiz. Spread: 71.2°

Ordering Guide

Photo	Odering No.	Power	Model	CCT	Lumens	Description
	A-6810-030-CQ5	40W	BatLED I 30	5500K	3210	Number of LED: 30 Cree LED Input Voltage: 220V50Hz Net Weight: 7.3kg Dimensions: 284*333*200.5mm
	A-6810-030-CR4		BatLED I 30	5500K	3900	
	A-6810-030-WQ2		BatLED I 30	2700K	2622	
	A-6810-030-WP4		BatLED I 30	2700K	2400	
	A-6810-042-CQ5	55W	BatLED I 42	5500K	4494	Number of LED: 42 Cree LED Input Voltage: 220V50Hz Net Weight: 7.3kg Dimensions: 284*333*200.5mm
	A-6810-042-CR4		BatLED I 42	5500K	5460	
	A-6810-042-WQ2		BatLED I 42	2700K	3670	
	A-6810-042-WP4		BatLED I 42	2700K	3385	

■ Packing Information

■ Dealer Information

