

BatLEDs Series II 60/II 84



Features:


- BatLEDs due to its appearance like Bats hanging from the ceilings.
- There are 4 models available and they are certified for CE, IP65 and Full RoHS compliance.
- Easy mounting Installation
- Use of cree Higt power LEDs

Application


Airports, Railway Stations, Warehouse, Supermarkets, Tunnels, Indoor Sport Arenas and Building exterior lighting

Technical Specifications

■ Outline Drawing

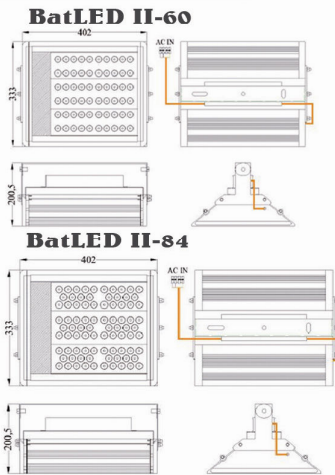

■ Polar Candela Distribution

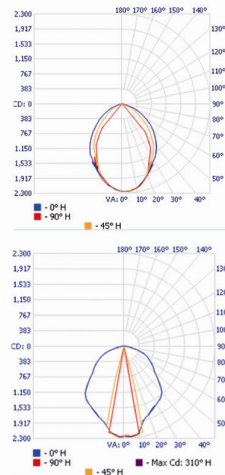

■ Illuminance

Distance (m)	Illuminance at a Distance	
	Center Beam LUX	Beam Width
1.7m	810.64 LUX	3.5m 2.4m
3.3m	202.66 LUX	6.9m 4.8m
5.0m	90.07 LUX	10.4m 7.2m
6.7m	50.67 LUX	13.8m 9.5m
8.3m	32.43 LUX	17.3m 11.9m
10.0m	22.52 LUX	20.7m 14.3m

■ Vert. Spread: 92.0° ■ Horiz. Spread: 71.2°

Ordering Guide

Photo	Odering No.	Power	Model	CCT	Lumens	Description
	A-6810-060-CQ5	80W	BatLED II 60	5500K	6420lm	Number of LED: 60 Cree LED Input Voltage: 220V50Hz Net Weight: 10.0kg Dimensions: 415*333*200.5mm
	A-6810-060-CR4		BatLED II 60	5500K	7800lm	
	A-6810-060-WQ2		BatLED II 60	2700K	5244lm	
	A-6810-060-WP4		BatLED II 60	2700K	4836lm	
	A-6810-084-CQ5	110W	BatLED II 84	5500K	8988lm	Number of LED: 84 Cree LED Input Voltage: 220V50Hz Net Weight: 10.0kg Dimensions: 415*333*200.5mm
	A-6810-084-CR4		BatLED II 84	5500K	10920lm	
	A-6810-084-WQ2		BatLED II 84	2700K	7341lm	
	A-6810-084-WP4		BatLED II 84	2700K	6753lm	

■ Packing Information

■ Dealer Information

