

Lucas Street Light LIII90/LIII114



Features:


- Maximum light output.
- High-efficiency heat transfer.
- Best to save energy.
- To ensure a large area illumination Coverage.
- Elegant Design.
- Using Cree XLamp High Power LED Chips.
- Uniformity brightness, luminous efficiency under any height.
- Cold light source; Non-thermal radiation;
- Non-hazardous metallic mercury; High-efficiency cooling features; Environmentally-Friendly.

Application


Rural and Urban Streets, Parks, Gardens, Residential Areas, and other needs of outdoor lighting.

Technical Specifications

Outline Drawing



Polar Candela Distribution

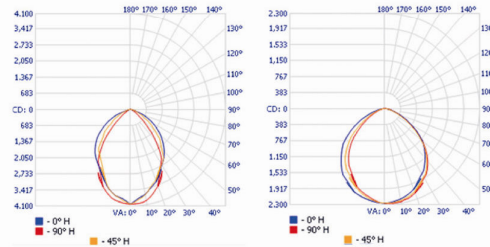

Illuminance

Height (m)	Illuminance at a Distance	
	Center Beam LUX	Beam Width
2.0m	1,005.06 LUX	4.1m 3.1m
4.0m	251.27 LUX	8.2m 6.1m
6.0m	111.67 LUX	12.3m 9.2m
8.0m	62.82 LUX	16.5m 12.2m
10.0m	40.20 LUX	20.6m 15.3m
12.0m	27.92 LUX	24.7m 18.3m

■ Vert. Spread: 91.6° ■ Horiz. Spread: 74.8°

Ordering Guide

Photo	Model No.	Power	Product Name	CCT	Lumens	Description
	A-6800-090-C05	115W	Lucas III 90	5500K	9630	Number of LED: 90 Cree LED Input Voltage: 220V50Hz IP65 Net Weight: 15.0kg Dimensions: 689*333*198mm
	A-6800-090-CR4		Lucas III 90	5500K	11700	
	A-6800-090-W02		Lucas III 90	2700K	7866	
	A-6800-090-WP4		Lucas III 90	2700K	7236	
	A-6800-114-C05	135W	Lucas III 114	5500K	12198	Number of LED: 114 Cree LED Input Voltage: 220V50Hz IP65 Net Weight: 15.0kg Dimensions: 689*333*198mm
	A-6800-114-CR4		Lucas III 114	5500K	14820	
	A-6800-114-W02		Lucas III 114	2700K	9918	
	A-6800-114-WP4		Lucas III 114	2700K	9120	

Packing Information

Dealer Information



U-Tron (Beijing) Electronics Co., Ltd.