



Features:

- They are designed for the many applications that require lightweight fittings.
- When used in conjunction with the appropriate lenses. U-Tron Venus luminaires can direct light to illuminate objects 30 meters away.



Application

Billboards, Factories, Warehouses, Gymnasium, Indoor Playgrounds, Tunnels, Indoor or Outdoor lighting Applications



Technical Specifications

Outline Drawing


Venus LED 10



Venus LED 14



Polar Candela Distribution

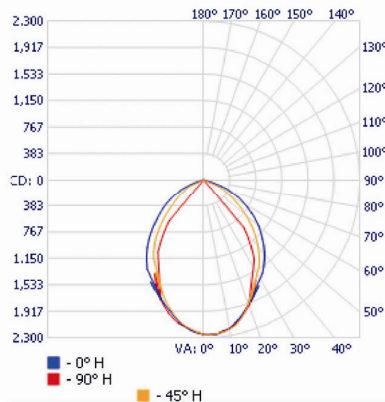

Illuminance

	Center Beam LUX	Beam Width	
3.3m	1,119.60 LUX	0.5m	4.6m
6.7m	279.90 LUX	1.0m	9.3m
10.0m	124.40 LUX	1.5m	13.9m
13.3m	69.98 LUX	2.0m	18.6m
16.7m	44.78 LUX	2.5m	23.2m
20.0m	31.10 LUX	3.0m	27.9m

■ Vert. Spread: 8.5° ■ Horiz. Spread: 69.7°

Ordering Guide

Photo	Ordering No	Power	Model	CCT	Lumens	Description
	A-6810-210-CQ5	16W	Venus 10	5500K	1070	Number of LED: 10 Cree Chips Input Voltage: 220V/50Hz Dimensions: 235x312x195mm
	A-6810-210-CR4		Venus 10	2700K	1300	
	A-6810-214-CQ5	24W	Venus 14	5500K	1498	Number of LED: 14 Cree Chips Input Voltage: 220V/50Hz Dimensions: 235x312x195mm
	A-6800-114-WR4		Venus 14	2700K	1820	

Packing Information

Dealer Information

